
## **ZHMB**

# Low Voltage Afumex LSOH **Cable Joint Kits**

(Excludes Connectors)



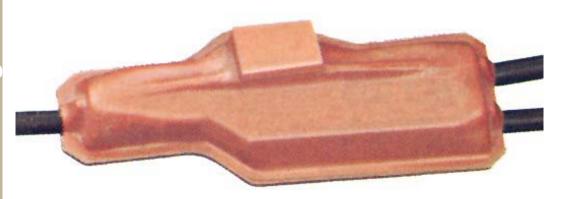

## **Application**

Branch joints for LSOH/LSF LV cables with copper conductors from 10mm<sup>2</sup> to 50mm<sup>2</sup>

## **Features**

- Low Hazard Isocynate free JEM resin

  - Twin Pack mixing in clear laminate sachets
    Extremely low viscosity combined with enhanced
- Rigid glass reinforced phenolic joint shells which are both fire retardant and LSOH
- Designed for use with compression and mechanical connectors






### **ZHMB Low Voltage Afumex LSOH Cable Joints**

### **Technical Data**

- > Low Voltage Branch Joints for 600/1000 Volt polymeric insulated copper conductors, SWA cables to BS6724 and IEC 60502-1 (halogen free).
- > Tested and approved to BS EN 50393 & ENA ER C81
- > Tests on complete joints to BS 6724 (using IEC 1034 methods) give smoke emission values  $A_0$  significantly less than the permitted maximum of 1.5.
- > Includes constant force spring Armour Bonds.
- > JEM Resin
  - Easier mixing in "Twin Pack" totally enclosed mixing in a clear laminate sachet.
  - Extremely low mix viscosity allows void free joint filling.
  - JEM Resin is insensitive to moisture and will cure under water.
  - Enhanced adhesion to XLPE, MDPE, PVC & lead.
  - High flash point, non-flammable liquid No special storage or transport requirements.
  - Not classified as irritating to the skin or eyes.
  - Does not cause skin sensitization.

Joint Component Characteristics					
Property	Test Method	Shell GF Phe- nolic	Resin Filled Acrylic		
Oxygen Index	BS2782 Pt.1Mth.141	>70	>26		
Temperature Index.	BS2782 Pt.1Mth.143	>350°C	-		
Heat Distortion Temp.	BS2782 Pt.1Mth.121A	>150°C	-		
Toxic Gas Emission	-	Nil	Nil		
Smoke Emission	BS6724	A <sub>0</sub> < 1.5	-		

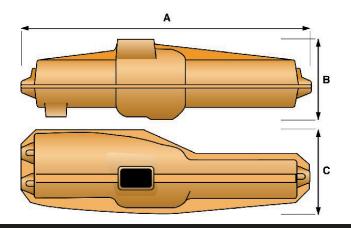

Shell Dimensions						
Straight Joint Ref.	А	В	С			
ZHMB1	420mm	150mm	150mm			
ZHMB2	520mm	195mm	180mm			

### Joint selection for 2, 3 and 4 core cables





600/1000V Afumex Branch Joints					
Nominal Area of Conductor	Two Core Ref.	Three Core Ref.	Four Core Ref.		
10mm²	ZHMB1	ZHMB1	ZHMB1		
16mm²	ZHMB1	ZHMB1	ZHMB2		
25mm²	ZHMB1	ZHMB1	ZHMB2		
35mm²	ZHMB1	ZHMB2	ZHMB2		
50mm <sup>2</sup>	ZHMB2	ZHMB2	ZHMB2		
70mm <sup>2</sup>	ZHMB2	ZHMB2	-		
95mm²	ZHMB2	ZHMB2	-		
120mm <sup>2</sup>	ZHMB2	-	-		







